ELEMENTS LAMINATE

atfa Australasian Timber Flooring Association

CE Deutsches Institut für Bautechnik DIBt floorscore ISO14001 ISO9001 A+ AC4 LOW VOC 100% ECO PRODUCT PET FRIENDLY HIGH PSI SLIPPROOF

ELEMENTS LAMINATE

STORM CLOUD

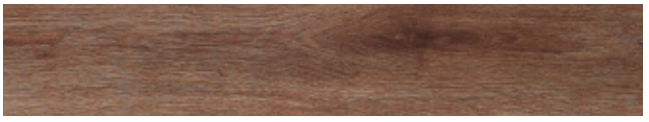

ALMOND BREEZE

CREAMED BIRCH

SAND OAK

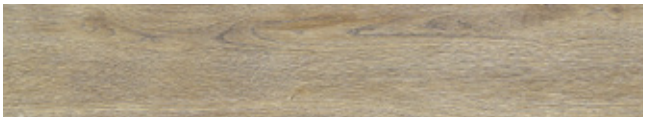

TARKINE

DRIFTWOOD

FROSTED BIRCH

WHEATFIELD OAK

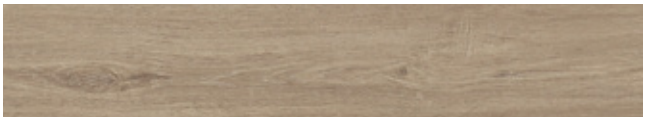

ESPRESSO OAK

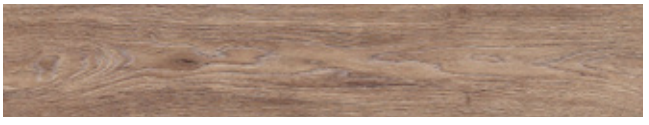

HIGHLAND OAK

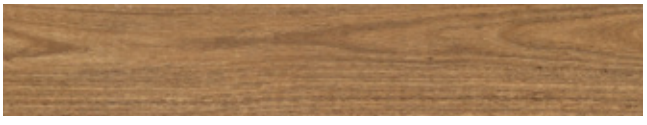

RIVERINA SPOTTED GUM

ECO FRIENDLY

NO PVC (PLASTIC)

HIGH PERFORMANCE ANTI- SCRATCH SLIP RESISTANCE

HIGH DEFINITION IMAGING

EMBOSSED WOOD GRAIN SURFACE

AUSTRALIAN SLIP AND FIRE TEST CERTIFIED.

PET FRIENDLY

EASY TO INSTALL

LIFETIME STRUCTURAL WARRANTY

LOW VOC EMISSIONS

ELEMENTS LAMINATE

MAINTENANCE GUIDE & CARE

GENERAL CARE

- Sweep floor regularly with an electrostatic broom, soft bristled broom, or wood floor mop.
- Dust and or clean with a soft bristled vacuum head. Ensure vacuum head is non-abrasive with no metal contact points.
- Remove spills promptly with an absorbent cloth or similar.
- Place mats at exterior and interior doors to trap sand and grit from incoming traffic.
- Use a rug or matt in high traffic areas to reduce wear & scuffing. Where possible periodically relocate rugs or large items to allow natural aging of the floor surface area.
- Place felt protectors on the legs of furniture to avoid scratches.
- Keep pets' claws properly trimmed to avoid excess scratches and gouges.
- Flooring must be always protected from direct sunlight. (Use of curtains, blinds, or UV resistant film on windows)

REGULAR CARE

- Do not use excessively wet mop floor surface area after installation. Too much water may allow seepage through the click profile and will create a moist environment under the floor planks.
- Do not use waxes or common household supermarket cleaners or detergents on the floor. These types of cleaning solutions are very abrasive. Long term use will dull the finish and soften the surface coating reducing its durability and sheen level.l.
- Chairs with roller wheels must be placed on protective mats to protect the surface coating.
- Do not let sand, dirt or grit build up on the floor surface.
- Avoid walking in narrow point or stiletto heel shoes as they may damage the surface of your floor.
- Do not roll or slide heavy furniture or appliances across flooring without surface protection or lift trolley.
- Place drip pans or protective matting underpot plants and animal feeding or bedding areas to avoid moisture ingress.

ELEMENTS LAMINATE

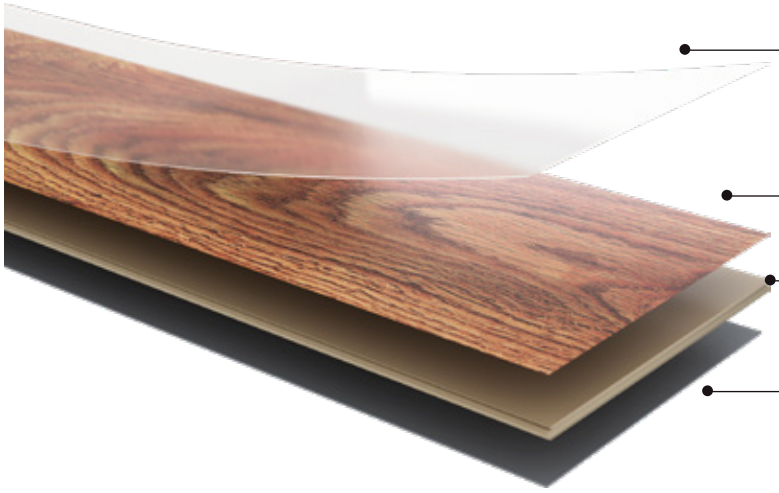

- Superior Anti-Scratch
- Heavy duty wear resistance
- Stain resistance
- Easy to maintain
- Extra Durability

- Variations on Colors Available
- Anti-ultraviolet

- High Density Core
- Super Stability for Lifetime

- Moisture Resistance
- Mold & Mildew Resistance

SPECIFICATIONS
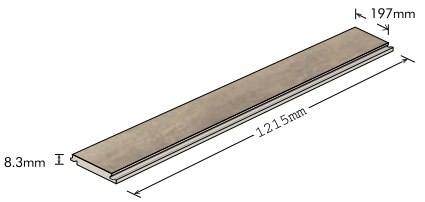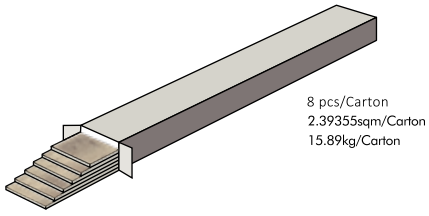
Plank Length	1215mm
Plank Width	197mm
Plank Thickness	8.3mm
Wear Layer	0.15mm
Sqm/Carton	2.39355sqm
KG/Carton	15.89kg
Carton/Pallet	60Cartons
KG/Pallet	953.59kg
Finish	Synchronization is Available
	Intricately Detailed Imagery
	Strong Anti-Scratch
Construction	High Density Core
Installation Type	Floating Floor
Warranty	25 Year Residential Warranty
	5 Year Commercial Warranty
Certification	FloorScore® Certified
	GreenGuard Gold Certified
Stability	Stable for Lifetime
Accessories	Color-Matched Accessories Available
Click Sytem	Angle to Angle Easy Click